


FR107

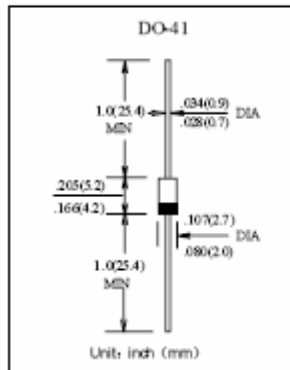

特征 Features

- 低的反向漏电流 Low reverse leakage
- 较强的正向浪涌承受能力 High forward surge capability
- 高温焊接保证 High temperature soldering guaranteed:
250°C/10 秒, 0.375" (9.5mm) 引线长度。
250°C/10 seconds, 0.375" (9.5mm) lead length,
- 引线可承受5 磅(2.3kg) 拉力。 5 lbs. (2.3kg) tension

机械数据 Mechanical Data

- 端子: 镀锡轴向引线 Terminals: Plated axial leads
- 极性: 色环端为负极 Polarity: Color band denotes cathode end
- 安装位置: 任意 Mounting Position: Any

极限值和温度特性 TA = 25°C 除非另有规定。

Maximum Ratings & Thermal Characteristics Ratings at 25°C ambient temperature unless otherwise specified.

	符号 Symbols	FR 101	FR 102	FR 103	FR 104	FR 105	FR 106	FR 107	单位 Unit
最大可重复峰值反向电压 Maximum repetitive peak reverse voltage	V_{RRM}	50	100	200	400	600	800	1000	V
最大均方根电压 Maximum RMS voltage	V_{RMS}	35	70	140	280	420	560	700	V
最大直流阻断电压 Maximum DC blocking voltage	V_{DC}	50	100	200	400	600	800	1000	V
最大正向平均整流电流 Maximum average forward rectified current	$I_F(AV)$	1.0							A
峰值正向浪涌电流 8.3ms单一正弦半波 Peak forward surge current 8.3 ms single half sine-wave	I_{FSM}	30							A
最大反向峰值电流 @TA = 75°C Maximum peak reverse current full cycle	$I_R(AV)$	30							μA
典型热阻 Typical thermal resistance	$R_{θJA}$	65							°C/W
工作结温和存储温度 Operating junction and storage temperature range	T_J, T_{STG}	-50 — +150							°C

电特性 TA = 25°C 除非另有规定。

Electrical Characteristics Ratings at 25°C ambient temperature unless otherwise specified.

	符号 Symbols	FR 101	FR 102	FR 103	FR 104	FR 105	FR 106	FR 107	单位 Unit
最大正向电压 $I_F = 1.0A$ Maximum forward voltage	V_F	1.3							V
最大反向电流 TA= 25°C Maximum reverse current TA=100°C	I_R	5.0 100							μA
最大反向恢复时间 $I_F=0.5A$ $I_R=1.0A$ $t_{RR}=0.25A$ MAX. Reverse Recovery Time	t_{rr}	150					300		nS
典型结电容 $V_R = 4.0V, f = 1MHz$ Type junction capacitance	C_j	15					8		pF

